


## Floating Ball Valve Side Entry Split Body

**Valves suitable for Oil & Gas production, processing, transportation, distribution, chemical and petrochemical refining.**

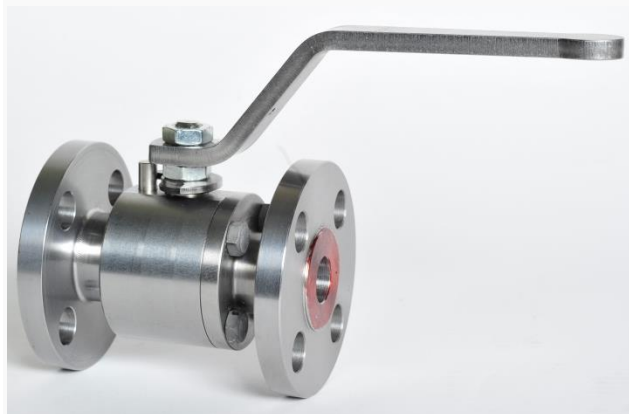

### GENERAL CONSTRUCTION

Floating ball valves have the obturator free from axial constraints and it is supported between two soft seat inserts; under pressure the ball compresses the downstream soft insert to obtain the sealing; these valves are generally recommended for use in clean service with limited sizes and ratings. Erresse production range offers a wide selection of models and construction suitable for critical services also.

### MATERIALS OF CONSTRUCTIONS

Low Temperature and Low Alloy Carbon Steel  
Stainless steel, Duplex and Super Duplex  
Nickel alloys  
Titanium  
Bronze

### APPLICATIONS

UTILITY

CORROSIVE & DIRTY

HIGH PRESSURE

### STANDARD FEATURES

<b>Construction</b>	Two or Three piece bolted body
<b>Port</b>	Reduced bore, full bore or fully piggable
<b>Stem retention</b>	Anti-blow-out stem
<b>Leakage rate</b>	ISO 5208 rate A soft seated, rate D metal seated
<b>Antistatic device</b>	Included, the ball valve design includes an electric conductive connection between the internal parts of the ball valve and the body, providing the anti-static function.
<b>Pressure relief</b>	Not foreseen on valve models VF2/VF3 ≤ ANSI 600 soft seated Self-relieving seats on valve models VF8-VF9 or metal seated
<b>Sealing</b>	Bi-directional Metal seated with Tungsten or Chrome Carbide coatings Soft seated with thermoplastic polymers (RPTFE, Nylon, PEEK, PCTFE), special polymers upon request Elastomers FKM, HNBR, EPDM O-Rings, special elastomers upon request
<b>Drain</b>	Not foreseen for this valve model
<b>Vent</b>	Not foreseen for this valve model
<b>Stem grease injectors</b>	Not foreseen for this valve model
<b>Seat grease injectors</b>	Not foreseen for this valve model
<b>Lifting points</b>	Not foreseen for this valve model
<b>Support feet</b>	Not foreseen for this valve model
<b>Stem extension</b>	Not foreseen for this valve model
<b>Valve operation</b>	Lever, Gear box or Actuator with position indicator and locking device
<b>Material testing</b>	Pressure containing & controlling parts to EN 10204 3.1 Materials in Sour Service according to NACE MR0175, MR0103, ISO 15156 Non-destructive testing (NDT) to API 6D, ASME B16.34
<b>Valve testing</b>	Hydrostatic & pneumatic testing to API 6D, ASME B16.34, ISO 5208 (other upon request)

### TECHNICAL DATA

<b>Design</b>	API 6D, API 6DSS, ASME B16.34, ISO 14313, ISO 17292
<b>Design pressure</b>	ASME B16.34, EN 1092-1, ISO 17292
<b>Body wall thickness</b>	ASME B16.34, ASME VIII Div. I, ISO 17292
<b>Face to Face</b>	API 6D, ASME B16.10 Long pattern
<b>Temperature range</b>	-50° to 200°C (-58° to 392°F)
<b>Pressures range</b>	PN20 (ANSI 150) to PN420 (ANSI 2500)
<b>Size range</b>	DN15 (1/2") to DN150 (6")
<b>End connections</b>	ASME B16.5 Flanged RF, FF, RTJ ASME B16.25 Butt-Weld BW ASME B16.11 Socket-Weld SW ASME B36.10 Plain-End PE ASME B1.20.1 Threaded NPT (F/M)

### APPROVALS

<b>Safety Integrity Level</b>	SIL 3
<b>Fire Safe</b>	API 607, API 6FA, BS 6755, ISO 10497-5
<b>Area Classification</b>	ATEX 94/9/EC
<b>Pressure Equipment Directive</b>	PED 97/23/EC
<b>Fugitive Emission</b>	ISO 15848/1
<b>Construction</b>	API 6D, API 6DSS